




# CHAINS

|                                              |   |
|----------------------------------------------|---|
| ROLLER CHAINS <b>QRC</b> <sup>®</sup>        | 3 |
| CHAIN PLATE STRAIGHT <b>QRC</b> <sup>®</sup> | 7 |
| CHAINS PINS DRILLED <b>QRC</b> <sup>®</sup>  | 7 |
| TRANSPORT CHAINS <b>CRT</b> <sup>®</sup>     | 9 |



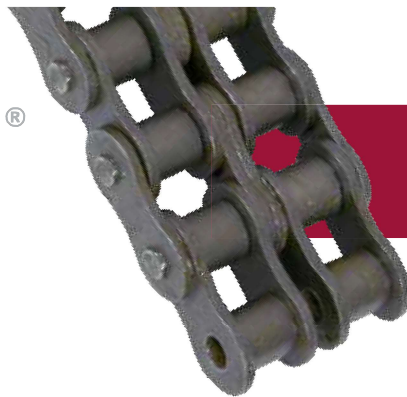

# ROLLER CHAINS EUROPEAN AND AMERICAN SERIES QRC®



**OFFSET  
SIMPLEX**



ONLY FOR  
ARTICLE  
O5 B1

**OFFSET  
WITH 3 ROLLERS**



**OFFSET  
DUPLEX**



**OFFSET  
TRIPLEX**



(\*)

**COUPLING**

**SIMPLEX - CLIP**




(◆)

**COUPLING**

**SIMPLEX - COTTER PIN**



**COUPLING  
DUPLEX**



**COUPLING  
TRIPLEX**

(\*) COUPLINGS with CLIP

(\*) COUPLINGS with CLIP part number ....5057

(◆) and/or COTTER PIN part number ....5157

(◆) COUPLINGS with COTTER PIN

from 04 (B1, B2, B3)  
to 12 (B1, B2, B3)

16 (B1, B2, B3)


from 20 (B1, B2, B3)  
to 32 (B1, B2, B3)



CHAINS MANUFACTURED  
BY AN **ISO 9001** CERTIFIED  
FACTORY

ACCORDING TO  
**ISO 606 - DIN 8187**

Pack of 5m

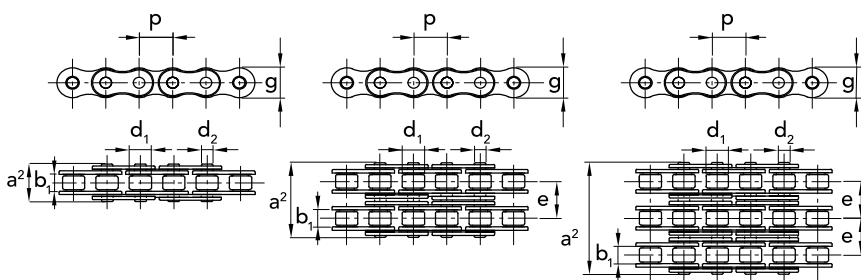

f = resistant surface

## SIMPLEX

| ISO N.     | COUPLING    |             |               | OFFSET |        | P       |       | b <sub>1</sub> | d <sub>2</sub> | d <sub>1</sub> | a <sup>2</sup> | g      | f               | breaking load | kg/m |
|------------|-------------|-------------|---------------|--------|--------|---------|-------|----------------|----------------|----------------|----------------|--------|-----------------|---------------|------|
|            | PART NUMBER | PART NUMBER | PART NUMBER   | mm     | inch   | min. mm | mm    | max mm         | max mm         | max mm         | max mm         | max mm | cm <sup>2</sup> | KN. min.      | =    |
| 04 B-1     | 70106007    | 70106057    | 70106087      | 6      | -      | 2,80    | 1,85  | 4              | 7,4            | 5              | 0,07           | 3,0    | 0,12            |               |      |
| 05 B-1     | 70108007    | 70108057    | 70108087      | 8      | -      | 3,00    | 2,31  | 5              | 8,6            | 7,11           | 0,11           | 5,0    | 0,18            |               |      |
| 06 B-1     | 70109007    | 70109057    | 70109087      | 9,525  | 3/8"   | 5,72    | 3,28  | 6,35           | 13,5           | 8,26           | 0,28           | 9,0    | 0,40            |               |      |
| 081-1      | 70110008    | 70110058    | 70110088      | 12,7   | 1/2"   | 3,3     | 3,64  | 7,75           | 9,3            | 9,8            | 0,2            | 8,0    | 0,28            |               |      |
| 083-1      | 70111008    | 70111058    | 70111088      | 12,7   | 1/2"   | 4,88    | 4,06  | 7,75           | 12,9           | 10,3           | 0,32           | 12,0   | 0,42            |               |      |
| 084-1      | 70171008    | 70171058    | 70171088      | 12,7   | 1/2"   | 4,88    | 4,06  | 7,75           | 14,2           | 11,0           | 0,35           | 16,0   | 0,59            |               |      |
| 08 B-1     | 70112007    | 70112057    | 70112087      | 12,7   | 1/2"   | 7,75    | 4,45  | 8,51           | 17             | 11,81          | 0,5            | 18,0   | 0,68            |               |      |
| 10 B-1     | 70115007    | 70115057    | 70115087      | 15,875 | 5/8"   | 9,65    | 5,08  | 10,16          | 19,6           | 14,73          | 0,67           | 22,4   | 0,91            |               |      |
| 12 B-1     | 70119007    | 70119057    | 70119087      | 19,05  | 3/4"   | 11,68   | 5,72  | 12,07          | 22,7           | 16,13          | 0,89           | 29,0   | 1,12            |               |      |
| 16 B-1     | 70125007    | 70125057    | 70125087      | 25,40  | 1"     | 17,02   | 8,28  | 15,88          | 36,1           | 21,08          | 2,1            | 60,0   | 2,59            |               |      |
| 16 B-1 (♦) |             | 70125157    | con coppiglia | 25,40  | 1"     | 17,02   | 8,28  | 15,88          | 36,1           | 21,08          | 2,1            | 60,0   | 2,59            |               |      |
| 20 B-1     | 70131007    | 70131057    | 70131087      | 31,75  | 1 1/4" | 19,56   | 10,19 | 19,05          | 43,2           | 26,42          | 2,95           | 95,00  | 3,68            |               |      |
| 24 B-1     | 70138007    | 70138057    | 70138087      | 38,1   | 1 1/2" | 25,40   | 14,63 | 25,4           | 53,4           | 33,4           | 5,54           | 160,0  | 6,85            |               |      |
| 28 B-1     | 70144007    | 70144057    | 70144087      | 44,45  | 1 3/4" | 30,99   | 15,9  | 27,94          | 65,1           | 37,08          | 7,4            | 200,0  | 8,56            |               |      |
| 32 B-1     | 70150007    | 70150057    | 70150087      | 50,8   | 2"     | 38,10   | 17,81 | 29,21          | 67,4           | 42,29          | 8,11           | 250,0  | 9,49            |               |      |

## DUPLEX

| ISO N.     | COUPLING    |             |                 | OFFSET |        | P       |       | b <sub>1</sub> | d <sub>2</sub> | d <sub>1</sub> | a <sup>2</sup>  | g        | f     | breaking load | kg/m |
|------------|-------------|-------------|-----------------|--------|--------|---------|-------|----------------|----------------|----------------|-----------------|----------|-------|---------------|------|
|            | PART NUMBER | PART NUMBER | PART NUMBER     | mm     | inch   | min. mm | mm    | max mm         | max mm         | max mm         | cm <sup>2</sup> | KN. min. | =     |               |      |
| 05 B-2     | 70208007    | 70208057    | 70208087        | 8      | -      | 3       | 2,31  | 5              | 14,3           | 7,11           | 5,64            | 0,22     | 9,8   | 0,36          |      |
| 06 B-2     | 70209007    | 70209057    | 70209087        | 9,525  | 3/8"   | 5,72    | 3,28  | 6,35           | 23,8           | 8,26           | 10,24           | 0,55     | 16,9  | 0,76          |      |
| 08 B-2     | 70212007    | 70212057    | 70212087        | 12,7   | 1/2"   | 7,75    | 4,45  | 8,51           | 31             | 11,81          | 13,92           | 1        | 32,0  | 1,31          |      |
| 10 B-2     | 70215007    | 70215057    | 70215087        | 15,875 | 5/8"   | 9,65    | 5,08  | 10,16          | 36,2           | 14,73          | 16,59           | 1,34     | 44,5  | 1,79          |      |
| 12 B-2     | 70219007    | 70219057    | 70219087        | 19,05  | 3/4"   | 11,68   | 5,72  | 12,07          | 42,2           | 16,13          | 19,46           | 1,78     | 57,8  | 2,22          |      |
| 16 B-2     | 70225007    | 70225057    | 70225087        | 25,40  | 1"     | 17,02   | 8,28  | 15,88          | 68             | 21,08          | 31,88           | 4,21     | 106,0 | 5,03          |      |
| 16 B-2 (♦) |             | 70225157    | with cotter pin | 25,40  | 1"     | 17,02   | 8,28  | 15,88          | 68             | 21,08          | 31,88           | 4,21     | 99,6  | 5,03          |      |
| 20 B-2     | 70231007    | 70231057    | 70231087        | 31,75  | 1 1/4" | 19,56   | 10,19 | 19,05          | 79,7           | 26,42          | 35,45           | 5,91     | 170,0 | 7,33          |      |
| 24 B-2     | 70238007    | 70238057    | 70238087        | 38,1   | 1 1/2" | 25,40   | 14,63 | 25,4           | 101,8          | 33,4           | 48,36           | 11,09    | 280,0 | 13,5          |      |
| 28 B-2     | 70244007    | 70244057    | 70244087        | 44,45  | 1 3/4" | 30,99   | 15,9  | 27,94          | 124,7          | 37,08          | 59,56           | 14,81    | 360,0 | 16,96         |      |
| 32 B-2     | 70250007    | 70250057    | 70250087        | 50,8   | 2"     | 30,99   | 17,81 | 29,21          | 126            | 42,29          | 58,55           | 16,23    | 450,0 | 18,74         |      |

## TRIPLEX

| ISO N.     | COUPLING    |             |                 | OFFSET |        | P       |       | b <sub>1</sub> | d <sub>2</sub> | d <sub>1</sub> | a <sup>2</sup>  | g        | f     | breaking load | kg/m |
|------------|-------------|-------------|-----------------|--------|--------|---------|-------|----------------|----------------|----------------|-----------------|----------|-------|---------------|------|
|            | PART NUMBER | PART NUMBER | PART NUMBER     | mm     | inch   | min. mm | mm    | max mm         | max mm         | max mm         | cm <sup>2</sup> | KN. min. | =     |               |      |
| 06 B-3     | 70309007    | 70309057    | 70309087        | 9,525  | 3/8"   | 5,72    | 3,28  | 6,35           | 34             | 8,26           | 10,24           | 0,83     | 24,9  | 1,12          |      |
| 08 B-3     | 70312007    | 70312057    | 70312087        | 12,7   | 1/2"   | 7,75    | 4,45  | 8,51           | 44,9           | 11,81          | 13,92           | 1,5      | 47,5  | 1,94          |      |
| 10 B-3     | 70315007    | 70315057    | 70315087        | 15,875 | 5/8"   | 9,65    | 5,08  | 10,16          | 52,8           | 14,73          | 16,59           | 2,02     | 66,7  | 2,68          |      |
| 12 B-3     | 70319007    | 70319057    | 70319087        | 19,05  | 3/4"   | 11,68   | 5,72  | 12,07          | 61,7           | 16,13          | 19,46           | 2,68     | 86,7  | 3,32          |      |
| 16 B-3     | 70325007    | 70325057    | 70325087        | 25,40  | 1"     | 17,02   | 8,28  | 15,88          | 99,9           | 21,08          | 31,88           | 6,32     | 160,0 | 7,65          |      |
| 16 B-3 (♦) |             | 70325157    | with cotter pin | 25,40  | 1"     | 17,02   | 8,28  | 15,88          | 99,9           | 21,08          | 31,88           | 6,32     | 149,4 | 7,65          |      |
| 20 B-3     | 70331007    | 70331057    | 70331087        | 31,75  | 1 1/4" | 19,56   | 10,19 | 19,05          | 116,1          | 26,42          | 35,45           | 8,86     | 250,0 | 10,96         |      |
| 24 B-3     | 70338007    | 70338057    | 70338087        | 38,1   | 1 1/2" | 25,40   | 14,63 | 25,4           | 150,2          | 33,4           | 48,36           | 16,64    | 425,0 | 20,2          |      |
| 28 B-3     | 70344007    | 70344057    | 70344087        | 44,45  | 1 3/4" | 30,99   | 15,9  | 27,94          | 184,3          | 37,08          | 59,56           | 22,21    | 530,0 | 25,38         |      |
| 32 B-3     | 70350007    | 70350057    | 70350087        | 50,8   | 2"     | 30,99   | 17,81 | 29,21          | 184,5          | 42,29          | 58,55           | 24,34    | 670,0 | 28,04         |      |

Please note: all QRC® chains are subject to pretensioning.  
This operation is made in order to fix dimension and stretching.

CAD drawings available on our site  
[www.chiaravalli.com](http://www.chiaravalli.com)


Quantity, availability and prices  
on B2B Chiaravalli





CHAINS MANUFACTURED  
BY AN **ISO 9001** CERTIFIED  
FACTORY

ACCORDING TO  
**ISO 606 - DIN 8187**

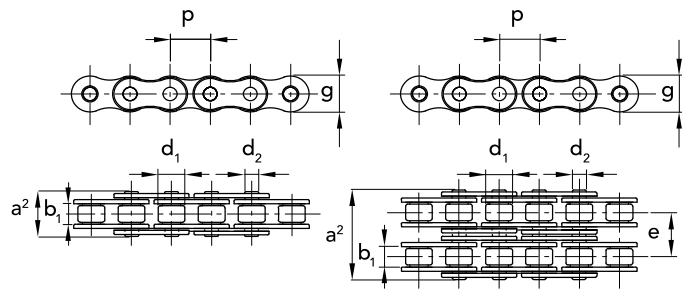

f = resistant surface

## SIMPLEX

### 100 mt in rolls

| ISO N. | CHAIN     | COUPLING  | OFFSET    | P     |      | b <sub>1</sub> | d <sub>2</sub> | d <sub>1</sub> | a <sup>2</sup> | g      | f               | breaking<br>load   | kg/m |
|--------|-----------|-----------|-----------|-------|------|----------------|----------------|----------------|----------------|--------|-----------------|--------------------|------|
|        | P. NUMBER | P. NUMBER | P. NUMBER | mm    | inch | min. mm        | mm             | max mm         | max mm         | max mm | cm <sup>2</sup> | N. mm <sup>2</sup> | =    |
| 05 B-1 | 72108007  | 70108057  | 70108087  | 8     | -    | 3,00           | 2,31           | 5              | 8,6            | 7,11   | 0,11            | 5,0                | 0,18 |
| 06 B-1 | 72109007  | 70109057  | 70109087  | 9,525 | 3/8" | 5,72           | 3,28           | 6,35           | 13,5           | 8,26   | 0,28            | 9,0                | 0,40 |
| 081-1  | 72110008  | 70110058  | 70110088  | 12,7  | 1/2" | 3,3            | 3,64           | 7,75           | 9,3            | 9,8    | 0,2             | 8,0                | 0,28 |
| 083-1  | 72111008  | 70111058  | 70111088  | 12,7  | 1/2" | 4,88           | 4,06           | 7,75           | 12,9           | 10,3   | 0,32            | 12,0               | 0,42 |
| 084-1  | 72171008  | 70171058  | 70171088  | 12,7  | 1/2" | 4,88           | 4,06           | 7,75           | 14,2           | 11,0   | 0,35            | 16,0               | 0,59 |

### 50 mt in rolls

| ISO N. | CHAIN     | COUPLING  | OFFSET    | P      |      | b <sub>1</sub> | d <sub>2</sub> | d <sub>1</sub> | a <sup>2</sup> | g      | f               | breaking<br>load   | kg/m |
|--------|-----------|-----------|-----------|--------|------|----------------|----------------|----------------|----------------|--------|-----------------|--------------------|------|
|        | P. NUMBER | P. NUMBER | P. NUMBER | mm     | inch | min. mm        | mm             | max mm         | max mm         | max mm | cm <sup>2</sup> | N. mm <sup>2</sup> | =    |
| 08 B-1 | 72112007  | 70112057  | 70112087  | 12,7   | 1/2" | 7,75           | 4,45           | 8,51           | 17             | 11,81  | 0,5             | 18,0               | 0,68 |
| 10 B-1 | 72115007  | 70115057  | 70115087  | 15,875 | 5/8" | 9,65           | 5,08           | 10,16          | 19,6           | 14,73  | 0,67            | 22,4               | 0,91 |

### 25 mt in rolls

| ISO N. | CHAIN     | COUPLING  | OFFSET    | P     |        | b <sub>1</sub> | d <sub>2</sub> | d <sub>1</sub> | a <sup>2</sup> | g      | f               | breaking<br>load   | kg/m |
|--------|-----------|-----------|-----------|-------|--------|----------------|----------------|----------------|----------------|--------|-----------------|--------------------|------|
|        | P. NUMBER | P. NUMBER | P. NUMBER | mm    | inch   | min. mm        | mm             | max mm         | max mm         | max mm | cm <sup>2</sup> | N. mm <sup>2</sup> | =    |
| 12 B-1 | 72119007  | 70119057  | 70119087  | 19,05 | 3/4"   | 11,68          | 5,72           | 12,07          | 22,7           | 16,13  | 0,89            | 29,0               | 1,12 |
| 16 B-1 | 72125007  | 70125057  | 70125087  | 25,40 | 1"     | 17,02          | 8,28           | 15,88          | 36,1           | 21,08  | 2,1             | 60,0               | 2,59 |
| 20 B-1 | 72131007  | 70131057  | 70131087  | 31,75 | 1 1/4" | 19,56          | 10,19          | 19,05          | 43,2           | 26,42  | 2,95            | 95,00              | 3,68 |

## DUPLEX

### 25 mt in rolls

| ISO N. | CHAIN     | COUPLING  | OFFSET    | P      |      | b <sub>1</sub> | d <sub>2</sub> | d <sub>1</sub> | a <sup>2</sup> | g      | e     | f               | breaking<br>load   | kg/m |
|--------|-----------|-----------|-----------|--------|------|----------------|----------------|----------------|----------------|--------|-------|-----------------|--------------------|------|
|        | P. NUMBER | P. NUMBER | P. NUMBER | mm     | inch | min. mm        | mm             | max mm         | max mm         | max mm | mm    | cm <sup>2</sup> | N. mm <sup>2</sup> | =    |
| 06 B-2 | 72209007  | 70209057  | 70209087  | 9,525  | 3/8" | 5,72           | 3,28           | 6,35           | 23,8           | 8,26   | 10,24 | 0,55            | 16,9               | 0,76 |
| 08 B-2 | 72212007  | 70212057  | 70212087  | 12,7   | 1/2" | 7,75           | 4,45           | 8,51           | 31             | 11,81  | 13,92 | 1               | 32,0               | 1,31 |
| 10 B-2 | 72215007  | 70215057  | 70215087  | 15,875 | 5/8" | 9,65           | 5,08           | 10,16          | 36,2           | 14,73  | 16,59 | 1,34            | 44,5               | 1,79 |
| 12 B-2 | 72219007  | 70219057  | 70219087  | 19,05  | 3/4" | 11,68          | 5,72           | 12,07          | 42,2           | 16,13  | 19,46 | 1,78            | 57,8               | 2,22 |
| 16 B-2 | 72225007  | 70225057  | 70225087  | 25,40  | 1"   | 17,02          | 8,28           | 15,88          | 68             | 21,08  | 31,88 | 4,21            | 106,0              | 5,03 |

Please note: all QRC® chains are subject to pretensioning.  
This operation is made in order to fix dimension and stretching.

CAD drawings available on our site  
[www.chiaravalli.com](http://www.chiaravalli.com)

Quantity, availability and prices  
on B2B Chiaravalli






CHAINS MANUFACTURED  
BY AN **ISO 9001** CERTIFIED  
FACTORY

ACCORDING TO  
**ISO 606 - DIN 8187**

Pack of 5m

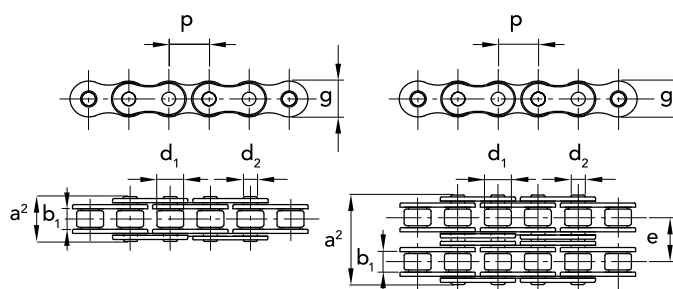

f = resistant surface

## SIMPLEX STAINLESS STEEL AISI 304

| ISO N. | CHAIN     | COUPLING  | OFFSET    | P     |      | b <sub>1</sub> | d <sub>2</sub> | d <sub>1</sub> | a <sup>2</sup> | g      | e    | f               | breaking<br>load   | kg/m |
|--------|-----------|-----------|-----------|-------|------|----------------|----------------|----------------|----------------|--------|------|-----------------|--------------------|------|
|        | P. NUMBER | P. NUMBER | P. NUMBER | mm    | inch | min. mm        | mm             | max mm         | max mm         | max mm | mm   | cm <sup>2</sup> | N. mm <sup>2</sup> | =    |
| 05 B-1 | 74108007  | 74108057  | 74108087  | 8,00  | -    | 3              | 2,31           | 5              | 8,6            | 7,11   | 0,11 | 0,18            | 5,0                | 0,18 |
| 06 B-1 | 74109007  | 74109057  | 74109087  | 9,53  | 3/8" | 5,72           | 3,28           | 6,35           | 13,5           | 8,26   | 0,28 | 0,41            | 6,2                | 0,40 |
| 08 B-1 | 74112007  | 74112057  | 74112087  | 12,70 | 1/2" | 7,75           | 4,45           | 8,51           | 17             | 11,81  | 0,5  | 0,7             | 12,0               | 0,68 |
| 10 B-1 | 74115007  | 74115057  | 74115087  | 15,88 | 5/8" | 9,65           | 5,08           | 10,16          | 19,6           | 14,73  | 0,67 | 0,95            | 14,5               | 0,91 |
| 12 B-1 | 74119007  | 74119057  | 74119087  | 19,05 | 3/4" | 11,68          | 5,72           | 12,07          | 22,7           | 16,13  | 0,89 | 1,25            | 18,5               | 1,12 |
| 16 B-1 | 74125007  | 74125057  | 74125087  | 25,40 | 1"   | 17,02          | 8,28           | 15,88          | 36,1           | 21,08  | 2,1  | 2,7             | 40,0               | 2,59 |
|        |           |           |           |       |      |                |                |                |                |        |      |                 |                    |      |
|        |           |           |           |       |      |                |                |                |                |        |      |                 |                    |      |
|        |           |           |           |       |      |                |                |                |                |        |      |                 |                    |      |
|        |           |           |           |       |      |                |                |                |                |        |      |                 |                    |      |
|        |           |           |           |       |      |                |                |                |                |        |      |                 |                    |      |

## DUPLEX STAINLESS STEEL AISI 304

| ISO N. | CHAIN     | COUPLING  | OFFSET    | P     |      | b <sub>1</sub> | d <sub>2</sub> | d <sub>1</sub> | a <sup>2</sup> | g     | e               | f                  | breaking<br>load | kg/m |
|--------|-----------|-----------|-----------|-------|------|----------------|----------------|----------------|----------------|-------|-----------------|--------------------|------------------|------|
|        | P. NUMBER | P. NUMBER | P. NUMBER | mm    | inch | min. mm        | mm             | max mm         | max mm         | mm    | cm <sup>2</sup> | N. mm <sup>2</sup> | =                |      |
| 06 B-2 | 74209007  | 74209057  | 74209087  | 9,53  | 3/8" | 5,72           | 3,28           | 6,35           | 23,8           | 8,26  | 10,24           | 0,55               | 8,4              | 1,35 |
| 08 B-2 | 74212007  | 74212057  | 74212087  | 12,70 | 1/2" | 7,75           | 4,45           | 8,51           | 31             | 11,81 | 13,92           | 1                  | 16,0             | 1,85 |
| 10 B-2 | 74215007  | 74215057  | 74215087  | 15,88 | 5/8" | 9,65           | 5,08           | 10,16          | 36,2           | 14,73 | 16,59           | 1,34               | 22,2             | 2,20 |
| 12 B-2 | 74219007  | 74219057  | 74219087  | 19,05 | 3/4" | 11,68          | 5,72           | 12,07          | 42,2           | 16,13 | 19,46           | 1,78               | 28,5             | 2,50 |
| 16 B-2 | 74225007  | 74225057  | 74225087  | 25,40 | 1"   | 17,02          | 8,28           | 15,88          | 68             | 21,08 | 31,88           | 4,21               | 53               | 5,40 |
|        |           |           |           |       |      |                |                |                |                |       |                 |                    |                  |      |
|        |           |           |           |       |      |                |                |                |                |       |                 |                    |                  |      |
|        |           |           |           |       |      |                |                |                |                |       |                 |                    |                  |      |
|        |           |           |           |       |      |                |                |                |                |       |                 |                    |                  |      |

## SIMPLEX NICKEL - PLATED

| ISO N.     | CHAIN     | COUPLING  | OFFSET    | P     |      | b <sub>1</sub> | d <sub>2</sub> | d <sub>1</sub> | a <sup>2</sup> | g      | f               | breaking load      | kg/m |
|------------|-----------|-----------|-----------|-------|------|----------------|----------------|----------------|----------------|--------|-----------------|--------------------|------|
|            | P. NUMBER | P. NUMBER | P. NUMBER | mm    | inch | min. mm        | mm             | max mm         | max mm         | max mm | cm <sup>2</sup> | N. mm <sup>2</sup> | =    |
| 06 B-1     | 73109007  | 73109057  | 73109087  | 9,53  | 3/8" | 5,72           | 3,28           | 6,35           | 13,5           | 8,26   | 0,28            | 8,2                | 0,41 |
| 08 B-1     | 73112007  | 73112057  | 73112087  | 12,70 | 1/2" | 7,75           | 4,45           | 8,51           | 17             | 11,81  | 0,5             | 16,4               | 0,70 |
| 10 B-1     | 73115007  | 73115057  | 73115087  | 15,88 | 5/8" | 9,65           | 5,08           | 10,16          | 19,6           | 14,73  | 0,67            | 20,5               | 0,95 |
| 12 B-1     | 73119007  | 73119057  | 73119087  | 19,05 | 3/4" | 11,68          | 5,72           | 12,07          | 22,7           | 16,13  | 0,89            | 26,5               | 1,25 |
| 16 B-1     | 73125007  | 73125057  | 73125087  | 25,40 | 1"   | 17,02          | 8,28           | 15,88          | 36,1           | 21,08  | 2,1             | 52,5               | 2,70 |
| 16 B-1 (*) |           | 73125157  | with clip | 25,40 | 1"   | 17,02          | 8,28           | 15,88          | 36,1           | 21,08  | 2,1             | 52,5               | 2,70 |
|            |           |           |           |       |      |                |                |                |                |        |                 |                    |      |
|            |           |           |           |       |      |                |                |                |                |        |                 |                    |      |
|            |           |           |           |       |      |                |                |                |                |        |                 |                    |      |

Please note: all QRC® chains are subject to pretensioning.  
This operation is made in order to fix dimension and stretching.

CAD drawings available on our site  
[www.chiaravalli.com](http://www.chiaravalli.com)

Quantity, availability and prices  
on B2B Chiaravalli






CHAINS MANUFACTURED  
BY AN **ISO 9001** CERTIFIED  
FACTORY

ACCORDING TO  
**ISO 606 - DIN 8187**

Please note: all QRC® chains are subject  
to pretensioning.  
This operation is made in order to fix  
dimension and stretching.

**Pack of 5m**

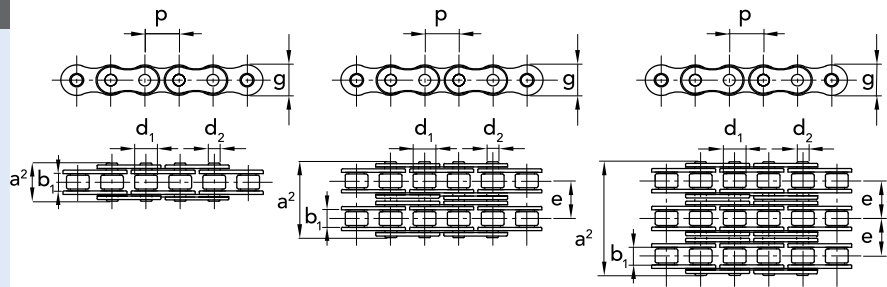

f = resistant surface

## SIMPLEX "ANSI" ASA

| ANSI N. | CHAIN<br>P. NUMBER | COUPLING<br>P. NUMBER | OFFSET<br>P. NUMBER | P      |        | b <sub>1</sub><br>min. mm | d <sub>2</sub><br>mm | d <sub>1</sub><br>max mm | a <sup>2</sup><br>max mm | g<br>max mm | f<br>cm <sup>2</sup> | breaking<br>load<br>KN. min. | kg/m<br>= |
|---------|--------------------|-----------------------|---------------------|--------|--------|---------------------------|----------------------|--------------------------|--------------------------|-------------|----------------------|------------------------------|-----------|
|         |                    |                       |                     | mm     | inch   |                           |                      |                          |                          |             |                      |                              |           |
| 35-1    | 71103007           | 71103057              | 71103087            | 9,525  | 3/8"   | 4,77                      | 3,58                 | 5,08                     | 13,2                     | 9,05        | 0,27                 | 7,9                          | 0,34      |
| 40-1    | 71104007           | 71104057              | 71104087            | 12,7   | 1/2"   | 7,95                      | 3,96                 | 7,92                     | 17,8                     | 12,07       | 0,44                 | 14,1                         | 0,63      |
| 50-1    | 71105007           | 71105057              | 71105087            | 15,875 | 5/8"   | 9,53                      | 5,08                 | 10,16                    | 21,8                     | 15,09       | 0,7                  | 22,2                         | 1,04      |
| 60-1    | 71106007           | 71106057              | 71106087            | 19,05  | 3/4"   | 12,7                      | 5,94                 | 11,91                    | 26,9                     | 18,08       | 1,06                 | 31,8                         | 1,52      |
| 80-1    | 71108007           | 71108057              | 71108087            | 25,40  | 1"     | 15,88                     | 7,92                 | 15,88                    | 33,5                     | 24,13       | 1,79                 | 56,7                         | 2,58      |
| 100-1   | 71110007           | 71110057              | 71110087            | 31,75  | 1 1/4" | 19,05                     | 9,53                 | 19,05                    | 41,1                     | 30,18       | 2,62                 | 88,5                         | 3,85      |
| 120-1   | 71112007           | 71112057              | 71112087            | 38,1   | 1 1/2" | 25,4                      | 11,1                 | 22,23                    | 50,8                     | 36,2        | 3,94                 | 127,0                        | 5,61      |
| 140-1   | 71114007           | 71114057              | 71114087            | 44,45  | 1 3/4" | 25,4                      | 12,7                 | 25,4                     | 54,9                     | 42,24       | 4,72                 | 172,4                        | 7,24      |
| 160-1   | 71116007           | 71116057              | 71116087            | 50,8   | 2"     | 31,75                     | 14,27                | 28,58                    | 65,5                     | 48,26       | 6,5                  | 226,8                        | 9,91      |

## DUPLEX "ANSI" ASA

| ANSI N. | CHAIN<br>P. NUMBER | COUPLING<br>P. NUMBER | OFFSET<br>P. NUMBER | P      |        | b <sub>1</sub><br>min. mm | d <sub>2</sub><br>mm | d <sub>1</sub><br>max mm | a <sup>2</sup><br>max mm | g<br>max mm | e<br>mm | f<br>cm <sup>2</sup> | breaking<br>load<br>KN. min. | kg/m<br>= |
|---------|--------------------|-----------------------|---------------------|--------|--------|---------------------------|----------------------|--------------------------|--------------------------|-------------|---------|----------------------|------------------------------|-----------|
|         |                    |                       |                     | mm     | inch   |                           |                      |                          |                          |             |         |                      |                              |           |
| 35-2    | 71203007           | 71203057              | 71203087            | 9,525  | 3/8"   | 4,77                      | 3,58                 | 5,08                     | 21,6                     | 9,05        | 10,13   | 0,54                 | 15,8                         | 0,67      |
| 40-2    | 71204007           | 71204057              | 71204087            | 12,7   | 1/2"   | 7,95                      | 3,96                 | 7,92                     | 32,3                     | 12,07       | 14,38   | 0,88                 | 28,2                         | 1,26      |
| 50-2    | 71205007           | 71205057              | 71205087            | 15,875 | 5/8"   | 9,53                      | 5,08                 | 10,16                    | 39,9                     | 15,09       | 18,11   | 1,4                  | 44,4                         | 2,05      |
| 60-2    | 71206007           | 71206057              | 71206087            | 19,05  | 3/4"   | 12,7                      | 5,94                 | 11,91                    | 49,8                     | 18,08       | 22,78   | 2,12                 | 63,6                         | 3,01      |
| 80-2    | 71208007           | 71208057              | 71208087            | 25,40  | 1"     | 15,88                     | 7,92                 | 15,88                    | 62,7                     | 24,13       | 29,29   | 3,58                 | 113,4                        | 5,13      |
| 100-2   | 71210007           | 71210057              | 71210087            | 31,75  | 1 1/4" | 19,05                     | 9,53                 | 19,05                    | 77                       | 30,18       | 35,76   | 5,24                 | 177,0                        | 7,64      |
| 120-2   | 71212007           | 71212057              | 71212087            | 38,1   | 1 1/2" | 25,4                      | 11,1                 | 22,23                    | 96,3                     | 36,2        | 45,44   | 7,88                 | 254,0                        | 11,13     |
| 140-2   | 71214007           | 71214057              | 71214087            | 44,45  | 1 3/4" | 25,4                      | 12,7                 | 25,4                     | 103,6                    | 42,24       | 48,87   | 9,44                 | 344,8                        | 14,37     |
| 160-2   | 71216007           | 71216057              | 71216087            | 50,8   | 2"     | 31,75                     | 14,27                | 28,58                    | 124,2                    | 48,26       | 58,55   | 13                   | 453,6                        | 19,68     |

## TRIPLEX "ANSI" ASA

| ANSI N. | CHAIN<br>P. NUMBER | COUPLING<br>P. NUMBER | OFFSET<br>P. NUMBER | P      |        | b <sub>1</sub><br>min. mm | d <sub>2</sub><br>mm | d <sub>1</sub><br>max mm | a <sup>2</sup><br>max mm | g<br>max mm | e<br>mm | f<br>cm <sup>2</sup> | breaking<br>load<br>KN. min. | kg/m<br>= |
|---------|--------------------|-----------------------|---------------------|--------|--------|---------------------------|----------------------|--------------------------|--------------------------|-------------|---------|----------------------|------------------------------|-----------|
|         |                    |                       |                     | mm     | inch   |                           |                      |                          |                          |             |         |                      |                              |           |
| 35-3    | 71303007           | 71303057              | 71303087            | 9,525  | 3/8"   | 4,77                      | 3,58                 | 5,08                     | 31,8                     | 9,05        | 10,13   | 0,81                 | 23,7                         | 0,99      |
| 40-3    | 71304007           | 71304057              | 71304087            | 12,7   | 1/2"   | 7,95                      | 3,96                 | 7,92                     | 46,7                     | 12,07       | 14,38   | 1,32                 | 42,3                         | 1,98      |
| 50-3    | 71305007           | 71305057              | 71305087            | 15,875 | 5/8"   | 9,53                      | 5,08                 | 10,16                    | 57,9                     | 15,09       | 18,11   | 2,1                  | 66,6                         | 3,06      |
| 60-3    | 71306007           | 71306057              | 71306087            | 19,05  | 3/4"   | 12,7                      | 5,94                 | 11,91                    | 72,6                     | 18,08       | 22,78   | 3,18                 | 95,4                         | 4,50      |
| 80-3    | 71308007           | 71308057              | 71308087            | 25,40  | 1"     | 15,88                     | 7,92                 | 15,88                    | 91,7                     | 24,13       | 29,29   | 5,37                 | 170,1                        | 7,67      |
| 100-3   | 71310007           | 71310057              | 71310087            | 31,75  | 1 1/4" | 19,05                     | 9,53                 | 19,05                    | 113                      | 30,18       | 35,76   | 7,86                 | 265,5                        | 11,43     |
| 120-3   | 71312007           | 71312057              | 71312087            | 38,1   | 1 1/2" | 25,4                      | 11,1                 | 22,23                    | 141,7                    | 36,2        | 45,44   | 11,82                | 381,0                        | 16,67     |
| 140-3   | 71314007           | 71314057              | 71314087            | 44,45  | 1 3/4" | 25,4                      | 12,7                 | 25,4                     | 152,4                    | 42,24       | 48,87   | 14,16                | 517,2                        | 21,51     |
| 160-3   | 71316007           | 71316057              | 71316087            | 50,8   | 2"     | 31,75                     | 14,27                | 28,58                    | 182,9                    | 48,26       | 58,55   | 19,5                 | 680,4                        | 29,45     |

## SIMPLEX REINFORCED

| ANSI N. | CHAIN<br>P. NUMBER | COUPLING<br>P. NUMBER | OFFSET<br>P. NUMBER | P     |        | b <sub>1</sub><br>min. mm | d <sub>2</sub><br>mm | d <sub>1</sub><br>max mm | a <sup>2</sup><br>max mm | g<br>max mm | f<br>cm <sup>2</sup> | breaking<br>load<br>KN. min. | kg/m<br>= |
|---------|--------------------|-----------------------|---------------------|-------|--------|---------------------------|----------------------|--------------------------|--------------------------|-------------|----------------------|------------------------------|-----------|
|         |                    |                       |                     | mm    | inch   |                           |                      |                          |                          |             |                      |                              |           |
| 60-H1   | 72906007           | 72906057              | 72906087            | 19,05 | 3/4"   | 12,7                      | 5,94                 | 11,91                    | 28,9                     | 18,08       | 1,06                 | 49,0                         | 1,70      |
| 80-H1   | 72908007           | 72908057              | 72908087            | 25,40 | 1"     | 15,88                     | 7,92                 | 15,88                    | 36,5                     | 24,13       | 1,79                 | 84,8                         | 2,90      |
| 100-H1  | 72910007           | 72910057              | 72910087            | 31,75 | 1 1/4" | 19,05                     | 9,53                 | 19,05                    | 42,9                     | 30,18       | 2,62                 | 122,6                        | 4,40      |
| 120-H1  | 72912007           | 72912057              | 72912087            | 38,1  | 1 1/2" | 25,4                      | 11,11                | 22,22                    | 54,1                     | 36,19       | 4,0                  | 160,5                        | 6,20      |

CAD drawings available on our site  
[www.chiaravalli.com](http://www.chiaravalli.com)

Quantity, availability and prices  
on B2B Chiaravalli




## CHAIN PLATE STRAIGHT QRC®

7

CHAINS MANUFACTURED  
BY AN **ISO 9001** CERTIFIED  
FACTORY

ACCORDING TO  
**ISO 606 - DIN 8187**

Pack of 5m



f = resistant surface

### SIMPLEX PLATE STRAIGHT

| ISO N. | CHAIN     | COUPLING  | OFFSET    | P      |      | b <sub>1</sub> | d <sub>2</sub> | d <sub>1</sub> | a <sup>2</sup> | g      | f               | breaking load      | kg/m |
|--------|-----------|-----------|-----------|--------|------|----------------|----------------|----------------|----------------|--------|-----------------|--------------------|------|
|        | P. NUMBER | P. NUMBER | P. NUMBER | mm     | inch | min. mm        | mm             | max mm         | max mm         | max mm | cm <sup>2</sup> | N. mm <sup>2</sup> | =    |
| 08B1   | 74112607  | 74112657  | 74112687  | 12,70  | 1/2" | 7,75           | 4,45           | 8,51           | 17,0           | 11,81  | 0,5             | 16,4               | 0,80 |
| 10B1   | 74115607  | 74115657  | 74115687  | 15,875 | 5/8" | 9,65           | 5,08           | 10,16          | 19,6           | 14,73  | 0,67            | 20,6               | 1,00 |
| 12B1   | 74119607  | 74119657  | 74119687  | 19,05  | 3/4" | 11,68          | 5,72           | 12,07          | 22,7           | 16,13  | 0,89            | 26,6               | 1,30 |
| 16B1   | 74125607  | 74125657  | 74125687  | 25,40  | 1"   | 11,02          | 8,28           | 15,88          | 36,1           | 21,08  | 2,10            | 52,7               | 2,90 |

### DUPLEX PLATE STRAIGHT

| ISO N. | CHAIN     | COUPLING  | P     |      | b <sub>1</sub> | d <sub>2</sub> | d <sub>1</sub> | a <sup>2</sup> | g      | f               | breaking load      | kg/m |
|--------|-----------|-----------|-------|------|----------------|----------------|----------------|----------------|--------|-----------------|--------------------|------|
|        | P. NUMBER | P. NUMBER | mm    | inch | min. mm        | mm             | max mm         | max mm         | max mm | cm <sup>2</sup> | N. mm <sup>2</sup> | =    |
| 10B2   | 74215607  | 74215657  | 15,88 | 5/8" | 9,65           | 5,08           | 10,16          | 36,2           | 14,73  | 1,34            | 41,1               | 2,50 |
| 12B2   | 74219607  | 74219657  | 19,05 | 3/4" | 11,68          | 5,72           | 12,07          | 42,2           | 16,13  | 1,78            | 53,3               | 2,60 |

CHAIN PLATE STRAIGHT QRC®




## CHAINS PINS DRILLED QRC®

CHAINS MANUFACTURED  
BY AN **ISO 9001** CERTIFIED  
FACTORY

ACCORDING TO  
**ISO 606 - DIN 8187**

Pack of 5m



f = resistant surface

### PINS DRILLED

| RIFERIM. | CHAIN     | COUPLING  | OFFSET    | P      |      | b <sub>1</sub> | d <sub>1</sub> | a <sup>2</sup> | Ø F    | g      | f               | breaking           | kg/m |
|----------|-----------|-----------|-----------|--------|------|----------------|----------------|----------------|--------|--------|-----------------|--------------------|------|
| N.       | P. NUMBER | P. NUMBER | P. NUMBER | mm     | inch | min. mm        | mm             | max mm         | max mm | max mm | cm <sup>2</sup> | N. mm <sup>2</sup> | =    |
| 08 BHP-1 | 74112707  | 74112757  | 74112787  | 12,7   | 1/2" | 7,75           | 8,51           | 17,00          | 4,4    | 11,7   | 0,7             | 13,5               | 0,50 |
| 10 BHP-1 | 74115707  | 74115757  | 74115787  | 15,875 | 5/8" | 9,65           | 10,16          | 21,00          | 5,1    | 14     | 1,0             | 20,0               | 0,80 |

Please note: all QRC® chains are subject  
to pretensioning.  
This operation is made in order to fix  
dimension and stretching.

CAD drawings available on our site  
[www.chiaravalli.com](http://www.chiaravalli.com)

Quantity, availability and prices  
on B2B Chiaravalli

CHAINS PINS DRILLED QRC®



**COUPLING**

**2 ATTACKS TYPE K**



**COUPLING**

**1 ATTACK TYPE A**



**COUPLING**

**BOLTS DRILLED**



**COUPLING**

**SOLID COUPLING PINS**



**COUPLING**

**PIN SURFACE**




CHAINS MANUFACTURED  
BY AN **ISO 9001** CERTIFIED  
FACTORY

Pack of 5m


f = resistant surface

## SOLID COUPLING PINS

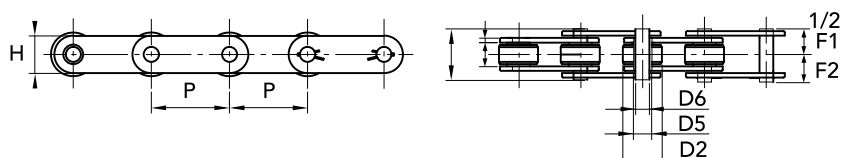


| CHAIN  | CHAIN<br>P. NUMBER | COUPLING<br>P. NUMBER | P<br>mm | L<br>mm | D2<br>mm | D5<br>mm | D6<br>mm | H<br>mm | S<br>mm | F1<br>mm | F2<br>mm | breaking<br>load<br>N. mm <sup>2</sup> | kg/m<br>catena |
|--------|--------------------|-----------------------|---------|---------|----------|----------|----------|---------|---------|----------|----------|----------------------------------------|----------------|
| 1,1205 | 74502050           | 74502055              | 50      | 11,5    | 25       | 8,35     | 5,7      | 18      | 2,5     | 25,5     | 15,4     | 18,0                                   | 1,70           |
| 1,1206 | 74502060           | 74502065              | 50      | 11,5    | 25       | 11       | 8        | 20      | 3       | 28,8     | 16,5     | 22,0                                   | 2,10           |
| 1,1400 | 74504000           | 74504005              | 50      | 15      | 31       | 13,2     | 10       | 23      | 3       | 32,6     | 19,2     | 32,0                                   | 3,00           |
| 1,1500 | 74505000           | 74505005              | 50      | 15      | 31       | 13,2     | 10       | 25      | 4       | 36,6     | 20,7     | 40,0                                   | 3,90           |
| 1,1505 | 74505020           | 74505025              | 100     | 15      | 31       | 13,2     | 10       | 25      | 4       | 36,6     | 20,7     | 40,0                                   | 2,90           |
| 1,1703 | 74507030           | 74507035              | 100     | 22      | 40       | 17       | 12       | 35      | 4       | 44       | 25       | 75,0                                   | 4,90           |

## SOLID COUPLING PINS TIPE "B"

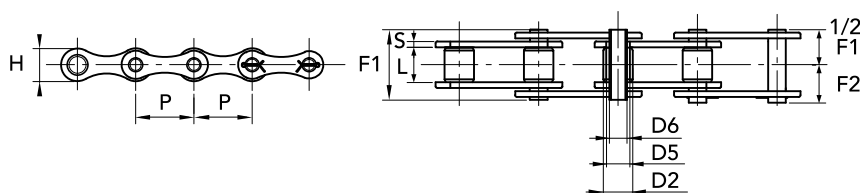

| CHAIN    | CHAIN<br>P. NUMBER | COUPLING<br>P. NUMBER | P<br>mm | L<br>mm | D2<br>mm | D5<br>mm | D6<br>mm | H<br>mm | S<br>mm | F1<br>mm | F2<br>mm | breaking<br>load<br>N. mm <sup>2</sup> | kg/m<br>catena |
|----------|--------------------|-----------------------|---------|---------|----------|----------|----------|---------|---------|----------|----------|----------------------------------------|----------------|
| 1,1400 B | 74514000           | 74514005              | 50      | 15      | 31       | 13,2     | 10       | 23      | 3       | 32,6     | 19,2     | 32,0                                   | 2,50           |

## SOLID COUPLING PINS WITH ATTACHMENTS

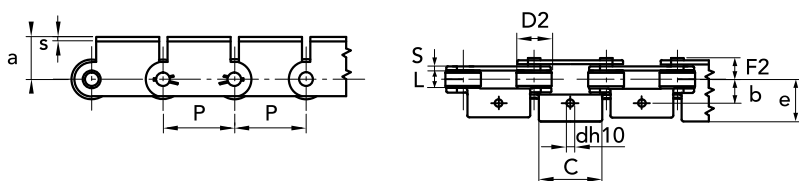

| CHAIN        | CHAIN<br>P. NUMBER | COUPLING<br>P. NUMBER | P<br>mm | D2<br>mm | a<br>mm | b<br>mm | c<br>mm | d<br>mm | e<br>mm | s<br>mm | L<br>mm | F2<br>mm | breaking<br>load<br>N. mm <sup>2</sup> | kg/m<br>attacco |
|--------------|--------------------|-----------------------|---------|----------|---------|---------|---------|---------|---------|---------|---------|----------|----------------------------------------|-----------------|
| 1.1205 A1-01 | 74522050           | 74522055              | 50      | 25       | 24      | 22      | 46      | 6,5     | 36      | 2,5     | 11,5    | 12,75    | 18,0                                   | 2,51            |

CAD drawings available on our site  
[www.chiaravalli.com](http://www.chiaravalli.com)

Quantity, availability and prices  
on B2B Chiaravalli




CHAINS MANUFACTURED  
BY AN **ISO 9001** CERTIFIED  
FACTORY

Pack of 5m


f = resistant surface

### SOLID COUPLING PINS WITH ATTACHMENTS

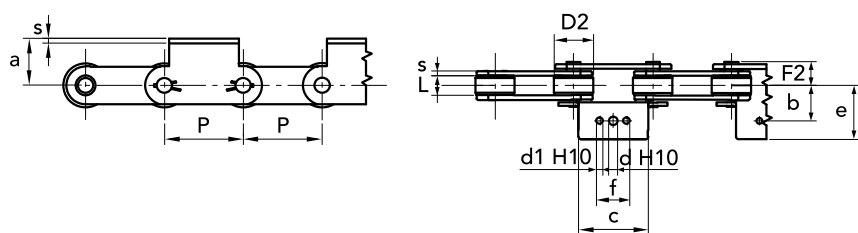



| CHAIN        | CHAIN<br>P. NUMBER | COUPLING<br>P. NUMBER | P<br>mm | D2<br>mm | a<br>mm | b<br>mm | c<br>mm | d<br>mm | e<br>mm | s<br>mm | d1<br>mm | f<br>mm | L<br>mm | F2<br>mm | breaking<br>load<br>N. mm <sup>2</sup> | kg/m |
|--------------|--------------------|-----------------------|---------|----------|---------|---------|---------|---------|---------|---------|----------|---------|---------|----------|----------------------------------------|------|
| 1.1205 A1-02 | 74532050           | 74522055              | 50      | 25       | 24      | 22      | 46      | 6,5     | 36      | 2,5     | -        | -       | 11,5    | 12,75    | 18,0                                   | 2,50 |
| 1.1400 A3-02 | 74534000           | 74534005              | 50      | 31       | 35      | 31      | 60      | 10,5    | 48,5    | 3       | 8,5      | 25      | 15      | 16,3     | 32,0                                   | 4,23 |
| 1.1500 A3-02 | 74535000           | 74535005              | 50      | 31       | 35      | 32      | 45      | 10,5    | 48      | 4       | 8,5      | 25      | 15      | 18,7     | 40,0                                   | 4,63 |

### SOLID COUPLING PINS WITH ATTACHMENTS

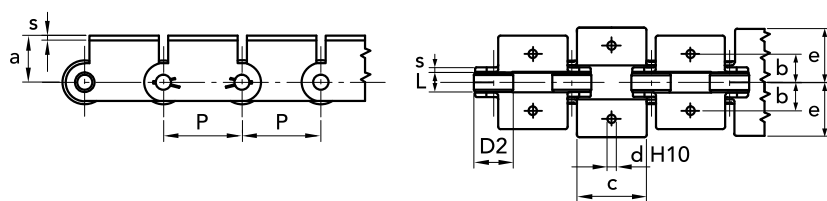

| CHAIN        | CHAIN<br>P. NUMBER | COUPLING<br>P. NUMBER | P<br>mm | D2<br>mm | a<br>mm | b<br>mm | c<br>mm | d<br>mm | e<br>mm | s<br>mm | L<br>mm | breaking<br>load<br>N. mm <sup>2</sup> | kg/m |
|--------------|--------------------|-----------------------|---------|----------|---------|---------|---------|---------|---------|---------|---------|----------------------------------------|------|
| 1.1205 K1-01 | 74542050           | 74542055              | 50      | 25       | 24      | 22      | 46      | 6,5     | 36      | 2,5     | 11,5    | 18,0                                   | 3,19 |

### SOLID COUPLING PINS WITH ATTACHMENTS

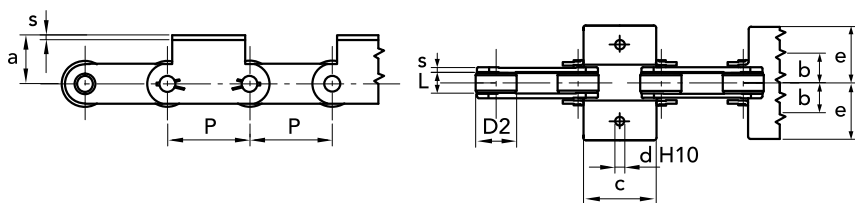

| CHAIN        | CHAIN<br>P. NUMBER | COUPLING<br>P. NUMBER | P<br>mm | D2<br>mm | a<br>mm | b<br>mm | c<br>mm | d<br>mm | e<br>mm | s<br>mm | L<br>mm | breaking<br>load<br>N. mm <sup>2</sup> | kg/m |
|--------------|--------------------|-----------------------|---------|----------|---------|---------|---------|---------|---------|---------|---------|----------------------------------------|------|
| 1.1205 K1-02 | 74552050           | 74542055              | 50      | 25       | 24      | 22      | 46      | 6,5     | 36      | 2,5     | 11,5    | 18,0                                   | 2,50 |

CAD drawings available on our site  
[www.chiaravalli.com](http://www.chiaravalli.com)

Quantity, availability and prices  
on B2B Chiaravalli




CHAINS MANUFACTURED  
BY AN **ISO 9001** CERTIFIED  
FACTORY

Pack of 5m

f = resistant surface


## STUD PIERCED

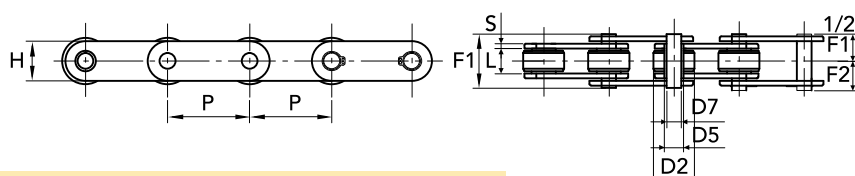

MATERIAL: **STAINLESS STEEL**


| CHAIN     | CHAIN<br>P. NUMBER | COUPLING<br>P. NUMBER | P<br>mm | L<br>mm | D2<br>mm | D5<br>mm | D6<br>mm | D7<br>mm | H<br>mm | S<br>mm | F1<br>mm | F2<br>mm | breaking<br>load<br>N. mm <sup>2</sup> | kg/m<br>chain |
|-----------|--------------------|-----------------------|---------|---------|----------|----------|----------|----------|---------|---------|----------|----------|----------------------------------------|---------------|
| 1.2250    | 74602500           | 74602505              | 50      | 11,5    | 25       | 11       | 9        | 6,2      | 20      | 2,5     | 26       | 14,5     | 30,0                                   | 1,80          |
| 1.2250 SS | 74695400           | 74695405              | 50      | 11,5    | 25       | 11       | 9        | 6,2      | 20      | 2,5     | 26       | 14,5     | 20,0                                   | 1,80          |
| 1.2400    | 74604000           | 74604005              | 50      | 15      | 31       | 17       | 14       | 10,2     | 25      | 3       | 31       | 17,5     | 35,0                                   | 3,00          |
| 1.2500    | 74605000           | 74605005              | 50      | 15      | 31       | 17       | 14       | 10,2     | 25      | 4       | 35       | 19,5     | 40,0                                   | 3,60          |
| 1.2501    | 74605010           | 74605015              | 75      | 15      | 31       | 17       | 14       | 10,2     | 25      | 4       | 35       | 19,5     | 40,0                                   | 3,10          |
| 1.2502    | 74605020           | 74605025              | 100     | 15      | 31       | 17       | 14       | 10,2     | 25      | 4       | 35       | 19,5     | 40,0                                   | 2,60          |

## STUD PIERCED

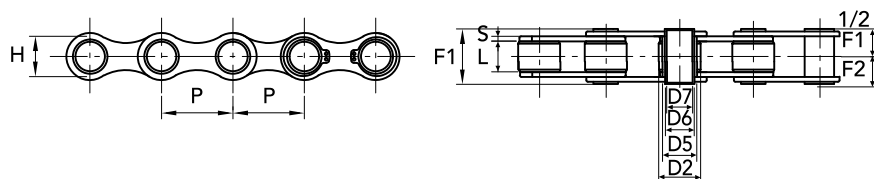


| CHAIN    | CHAIN<br>P. NUMBER | COUPLING<br>P. NUMBER | P<br>mm | L<br>mm | D2<br>mm | D5<br>mm | D6<br>mm | D7<br>mm | H<br>mm | S<br>mm | F1<br>mm | F2<br>mm | breaking<br>load<br>N. mm <sup>2</sup> | kg/m<br>chain |
|----------|--------------------|-----------------------|---------|---------|----------|----------|----------|----------|---------|---------|----------|----------|----------------------------------------|---------------|
| 1.3520 R | 74605200           | 74605205              | 35      | 16      | 20       | 17       | 14       | 10,2     | 26      | 2,5     | 30       | 16,7     | 25,0                                   | 2,20          |
| 1.3520 Z | 74615200           | 74615205              | 35      | 16      | 20       | 17       | 14       | 10,2     | 26      | 2,5     | 30       | 16,7     | 25,0                                   | 2,20          |

## A GALVANIZED BOLTS DRILLED

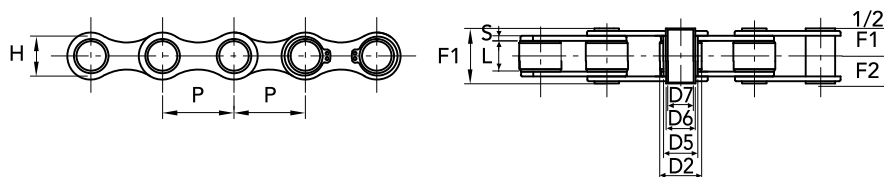

| CHAIN    | CHAIN<br>P. NUMBER | COUPLING<br>P. NUMBER | P<br>mm | L<br>mm | D2<br>mm | D5<br>mm | D6<br>mm | D7<br>mm | H<br>mm | S<br>mm | F1<br>mm | F2<br>mm | breaking<br>load<br>N. mm <sup>2</sup> | kg/m<br>chain |
|----------|--------------------|-----------------------|---------|---------|----------|----------|----------|----------|---------|---------|----------|----------|----------------------------------------|---------------|
| 1.1260 Z | 74612600           | 74612605              | 41,75   | 20,5    | 17       | 13,8     | 11       | 8,3      | 21,4    | 3       | 36       | 22,7     | 27,0                                   | 1,50          |

## A PINS, PROJECTIONS GALVANIZED

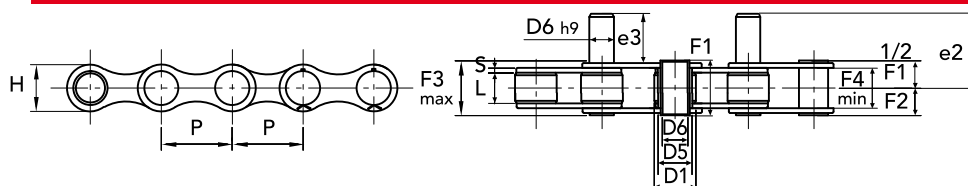

| CHAIN    | CHAIN<br>P. NUMBER | COUPLING<br>P. NUMBER | P<br>mm | L<br>mm | D1<br>mm | D5<br>mm | D6<br>mm | e2<br>mm | H<br>mm | S<br>mm | F1<br>mm | F2<br>mm | e3<br>mm | F3 max<br>mm | F4 min<br>mm | breaking<br>load<br>N. mm <sup>2</sup> | kg/m<br>chain |
|----------|--------------------|-----------------------|---------|---------|----------|----------|----------|----------|---------|---------|----------|----------|----------|--------------|--------------|----------------------------------------|---------------|
| 1.3521 Z | 74615210           | 74615215              | 35      | 16      | 20       | 13       | 10       | 48,5     | 26      | 2,5     | 31       | 19       | 35       | 21           | 21,5         | 35,0                                   | 2,80          |

CAD drawings available on our site  
[www.chiaravalli.com](http://www.chiaravalli.com)

Quantity, availability and prices  
on B2B Chiaravalli